

# LINX

## First Switch On

First steps to activate your LINX door lock

What you need:

- The Smartphone that you will also use in the future to manage and program the door
- The *RED Master Card 1*
- Mifare tags that you want to enable as keys or other blue cards in addition to the three you received with the door and which are already stored

Decide which PIN numeric codes you want to store

# 2

Download the ISEO Argo app for free



from the APP Store  
(iOS)



or  
Google Play (Android)



Enable geolocation for this APP


*Enable Bluetooth* communication on your phone

Stay near the door

# 3


Open the *Argo app* .

You will see the Linx lock button/icon on your smartphone display, identified by the lock's serial number

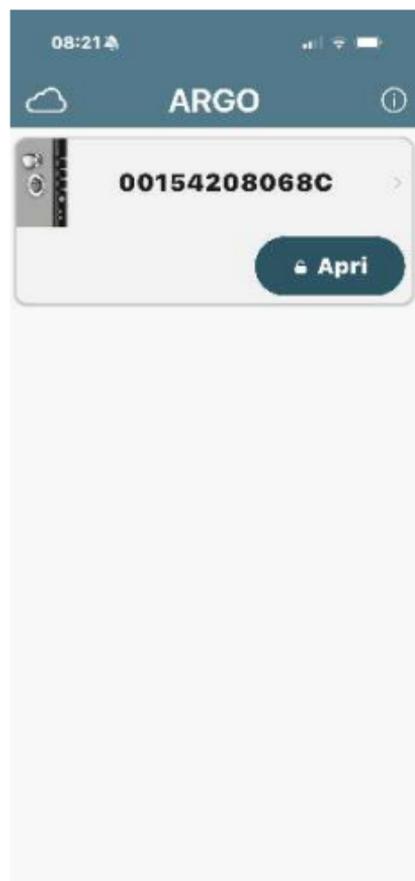

# 4

Presents the  
*Master Card 1 Red*  
to the reader, to enter  
*Programming Mode*

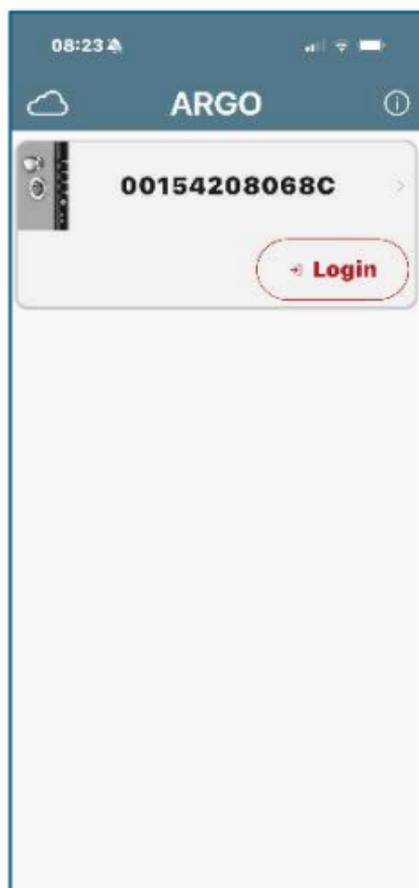

The Login button will  
appear,  
press it

# 5

Add your smartphone as a key to open the door

08:25

×

Dettaglio uten... Fatto

Nome  
iPhone

Tipo Utente

Utente Standard

★ Utente VIP

Funzioni

Abilita Modalità Ufficio

PIN Utente

Login alla serratura

Login

Elimina

Change the phone name and press **Done** to save it as a key

If you are using the master phone, first activate the Login flag

# 6

To add *Mifare* cards or tags as keys to open the door, present them in front of the reader at the door



They will automatically appear in the *User List* on your smartphone.

(you will already find the three blue tiles already stored in the list)

The last stored credential will be displayed at the top of the list.

By clicking on the device you will find the icon to remove it

# 7

If the door has a numeric keypad on the outside you can add PIN codes as keys to open the door

Always from the USERS menu press the button at the top right



Press PIN from this menu,  
Enter a number of at least 4 and up to 8 digits.  
Repeat the entry.  
Press Done.

Write down your number in a reserved place

## Change the door name



From the main menu  
press **Door Info**



Press **Door Name**,  
to change the device  
serial number to the  
real door name

# 9

Return to the *Main Menu*, then press the “<” symbol in the top left corner, to exit *Programming Mode*.

NOW, to open your LINX door, you can use: cards, *Mifare tags* , and previously stored PIN codes,



Or press the button/icon on your smartphone

To add or remove new devices, start again from point 4

# 10

Other things you can do with your LINX door:

Add or delete tiles, tags

Add or delete other smartphones as opening keys

If your door is equipped with a fingerprint reader you can add or delete fingerprints

Assign time slots to each key for enabling

Send disposable invitation codes

All information is present in the user manual

Rev 1.01 Jan /26